RF2401 Retrofitting Insulation Outside The Wall: From The Outside



pro clima®


www.proclima.co.nz
www.proclima.com.au


Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 1 of 6 - Remove Existing Weatherboard Over Bottom Plate

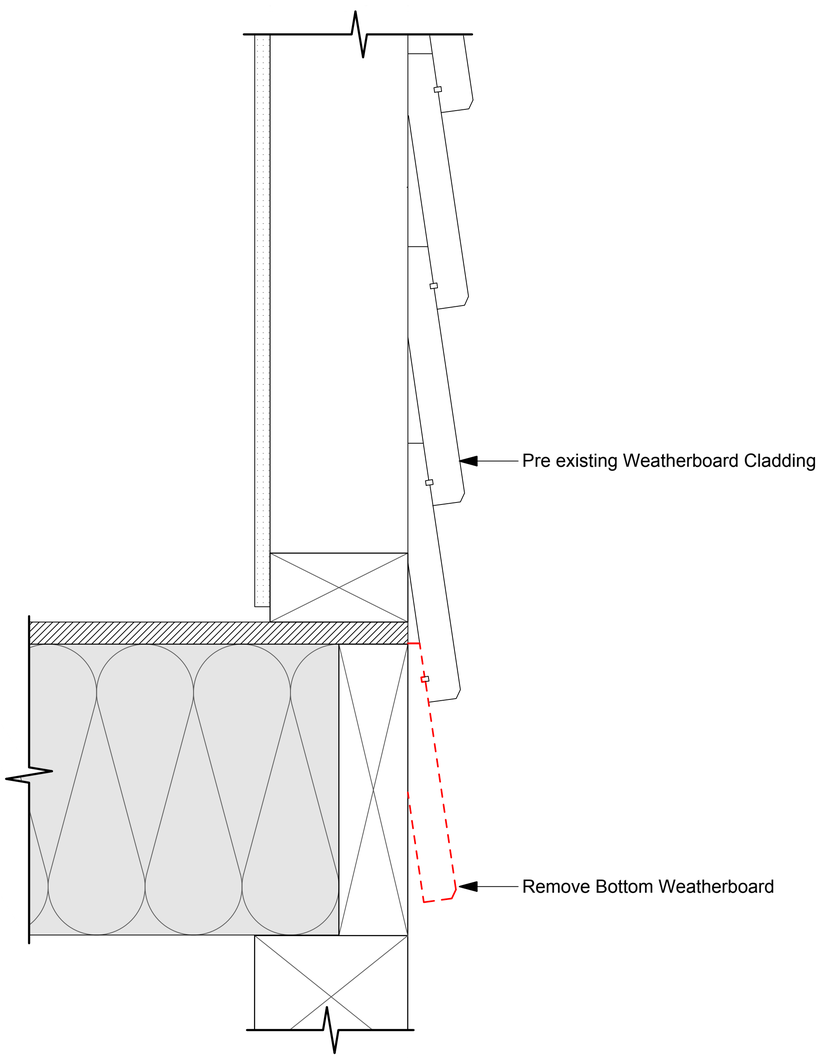

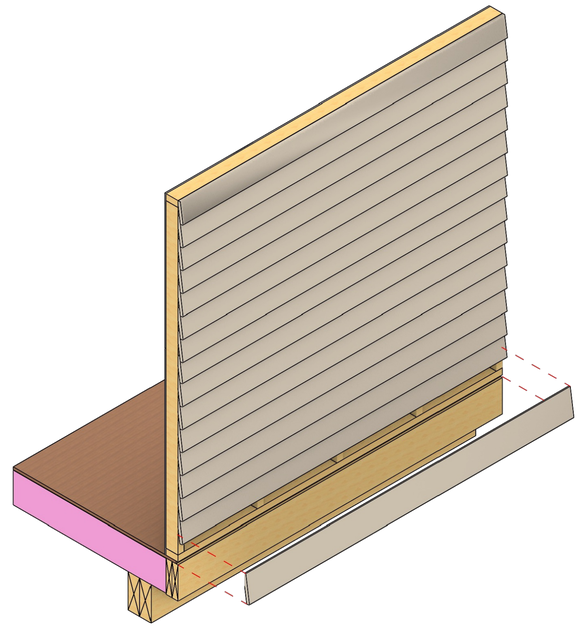

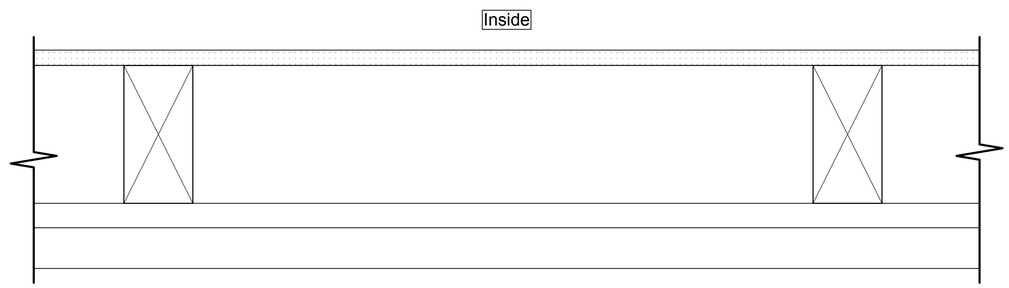

Horizontal Section

pro clima®


www.proclima.co.nz
www.proclima.com.au


Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 2 of 6 - SOLITEX EXTASANA ADHERO Over Existing Weatherboards

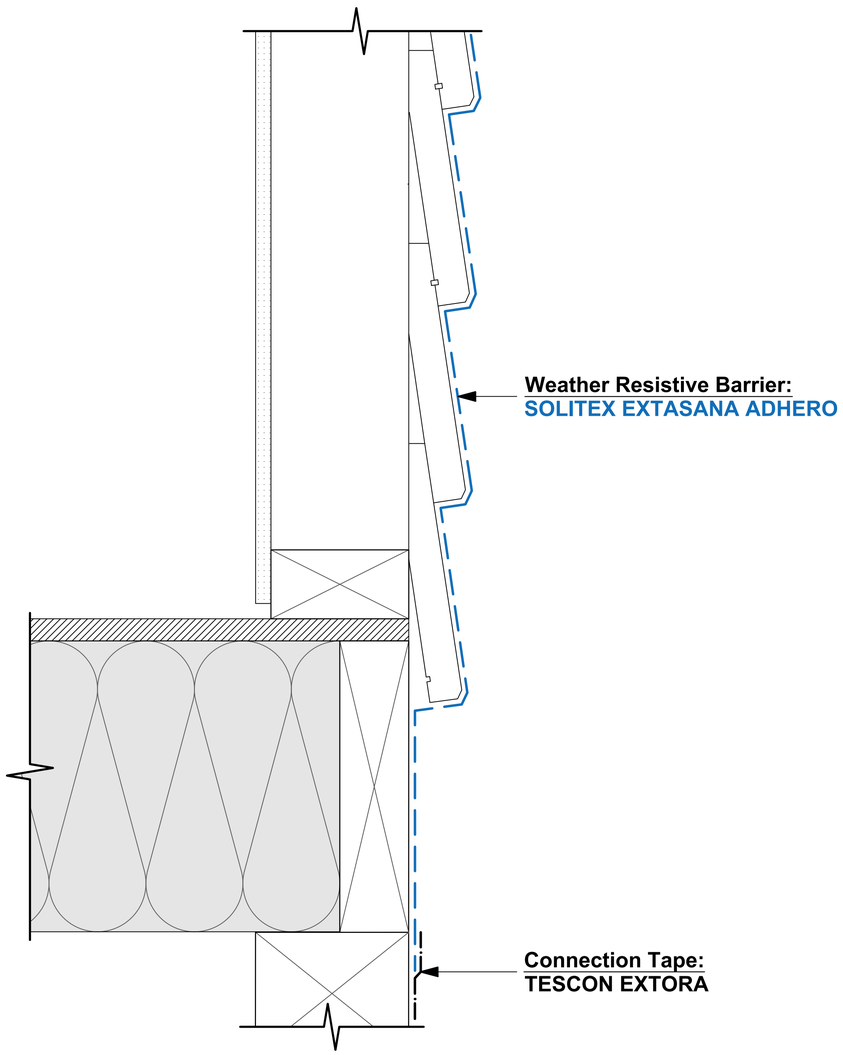

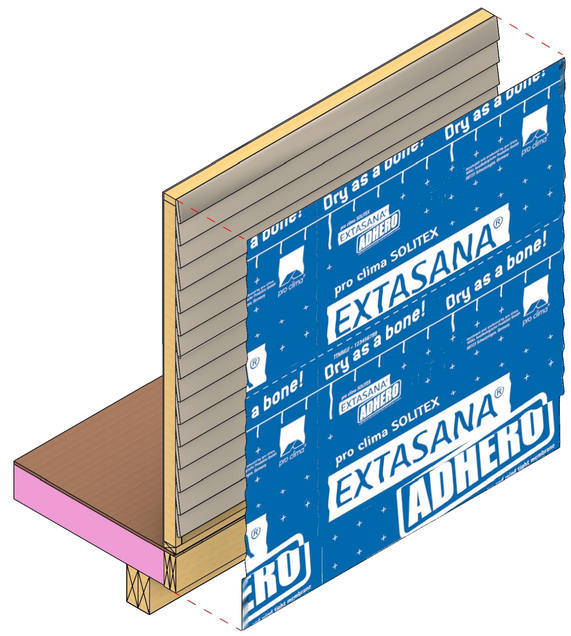

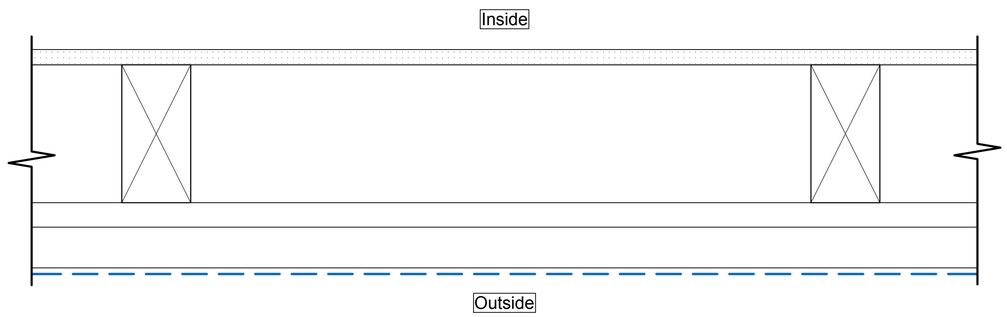

Horizontal Section

pro clima®


www.proclima.co.nz
www.proclima.com.au


Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 3 of 6 - Fix ParkaWrap Banana Bracket and Adjustable Perforated Cavity Closer

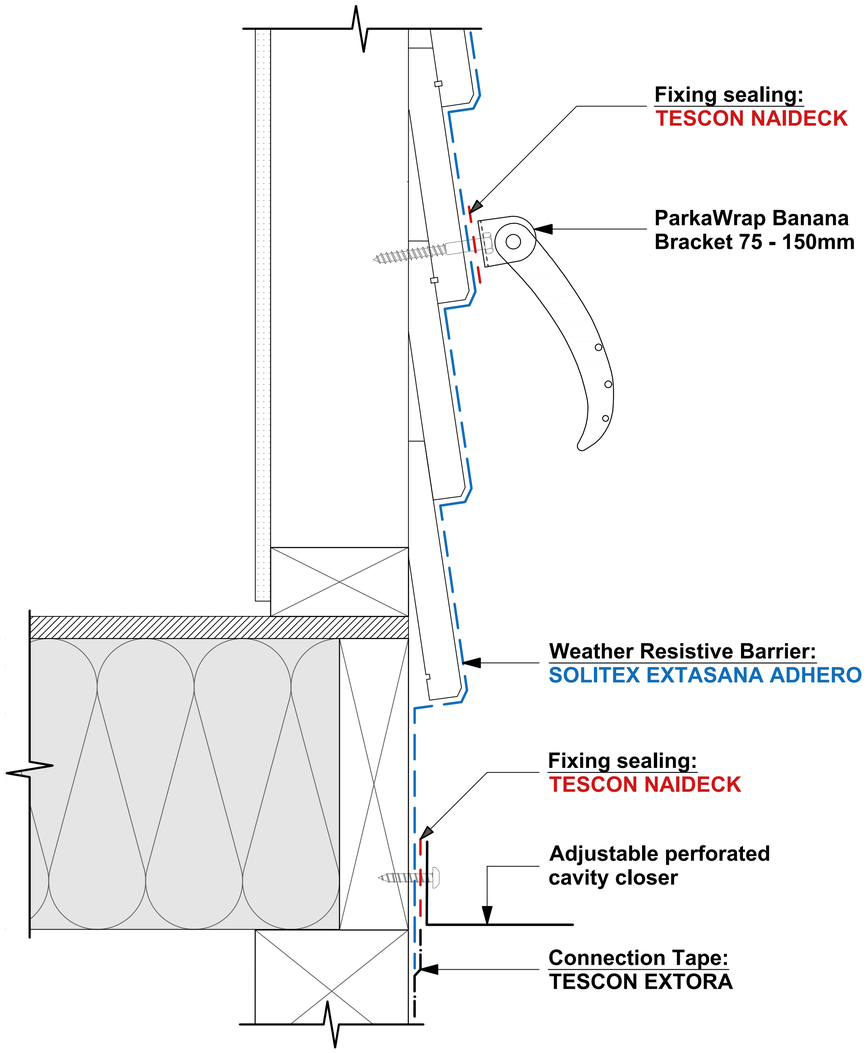

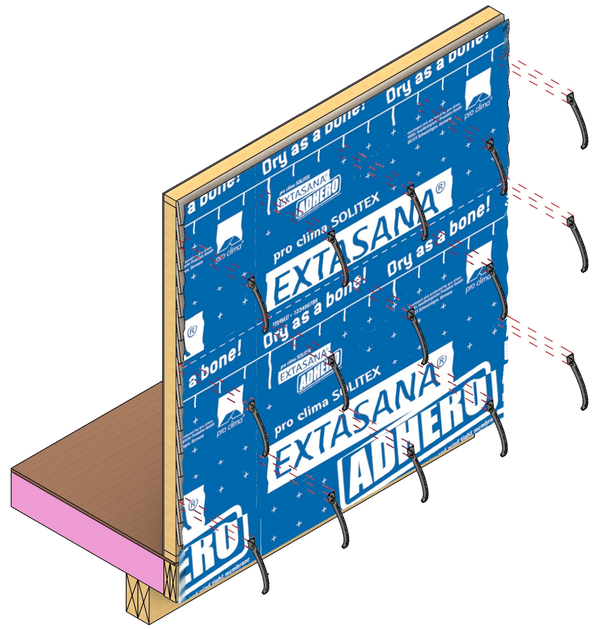

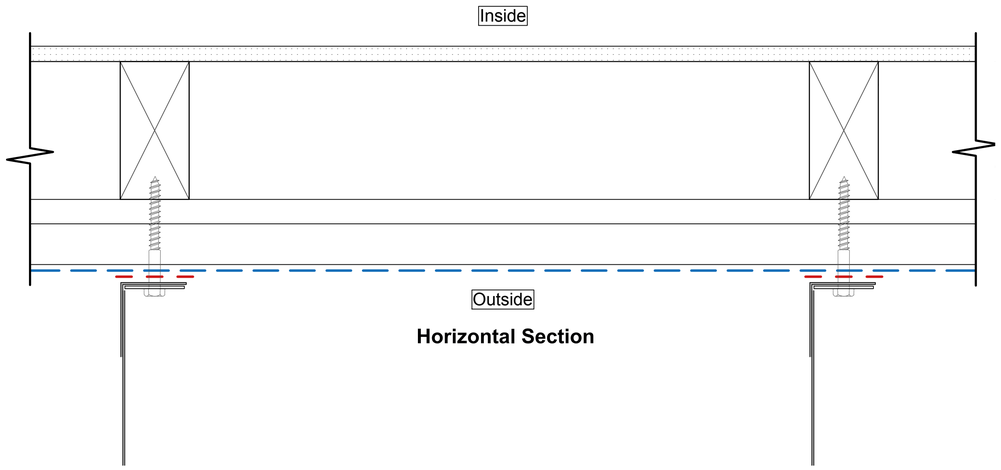

Horizontal Section

pro clima®


www.proclima.co.nz
www.proclima.com.au


Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 4 of 6 - Insert Rockwool Insulation Between Banana Bracket

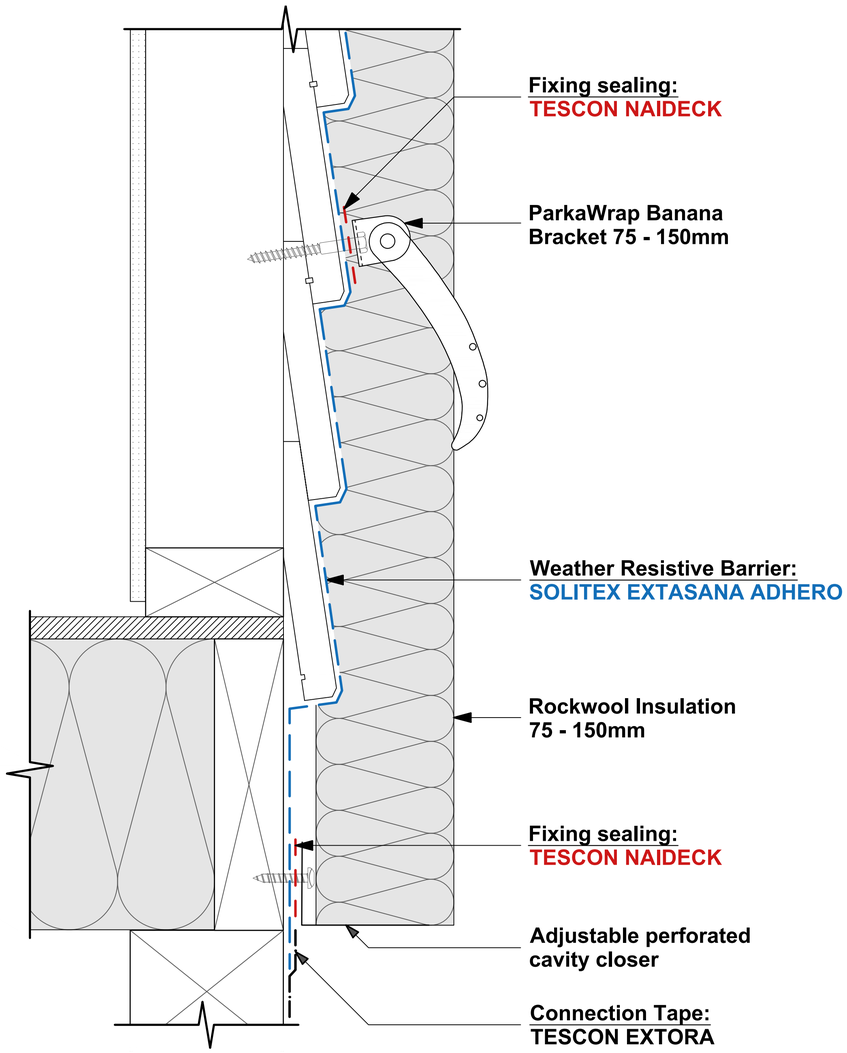

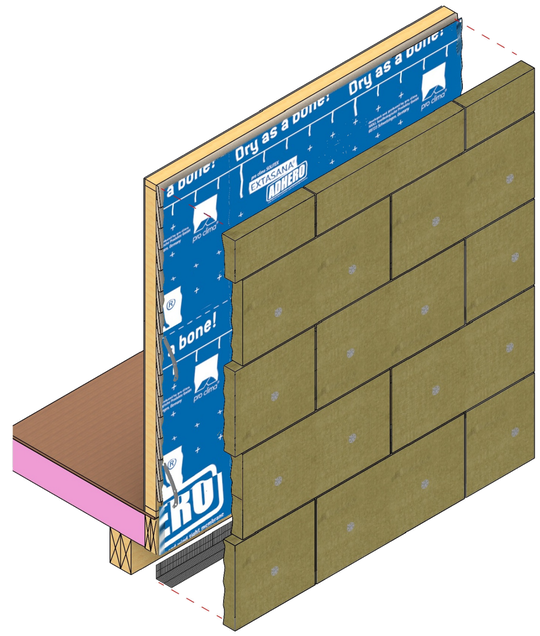

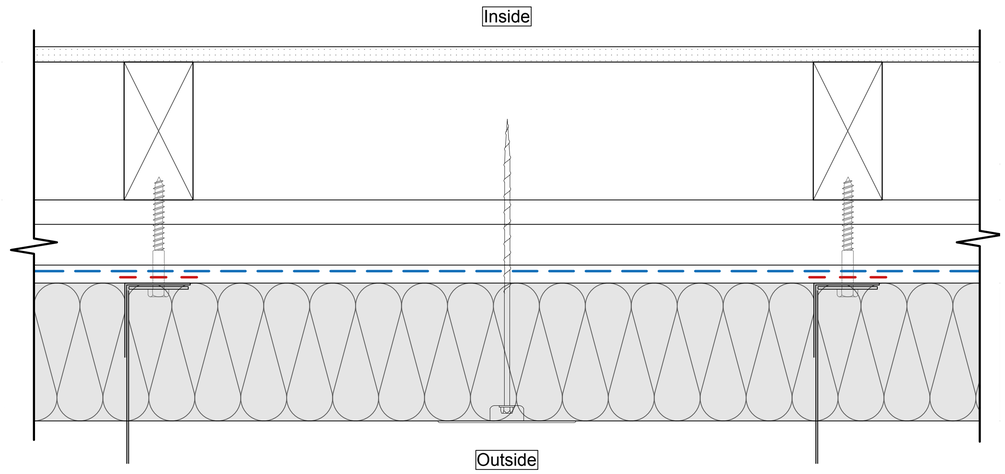

Horizontal Section

Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


pro clima®


www.proclima.co.nz
www.proclima.com.au


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 5 of 6 - Fix Cavity Battens to Banana Brackets

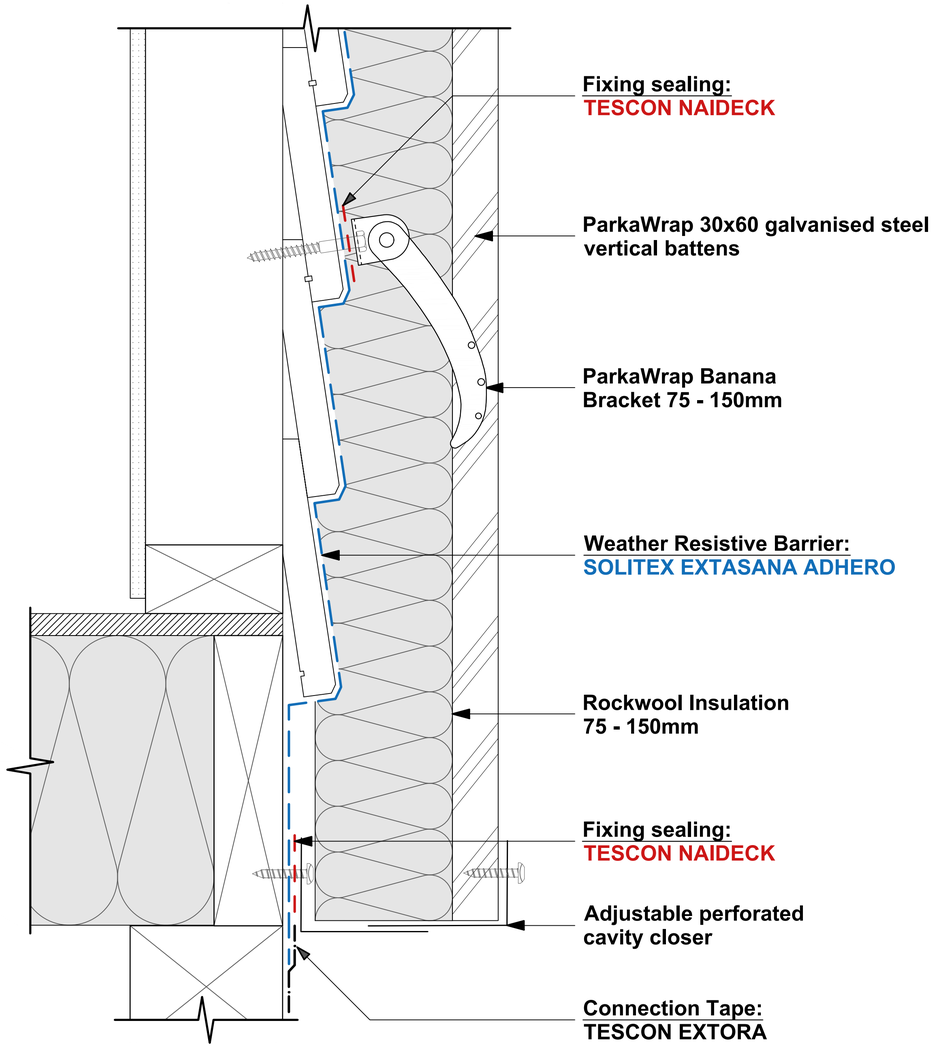

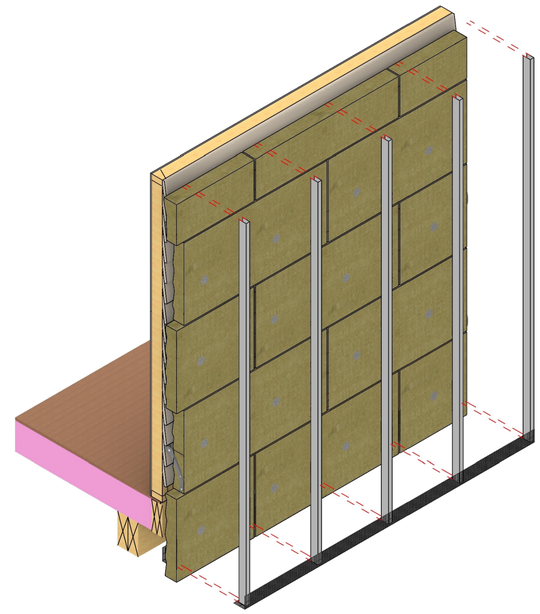

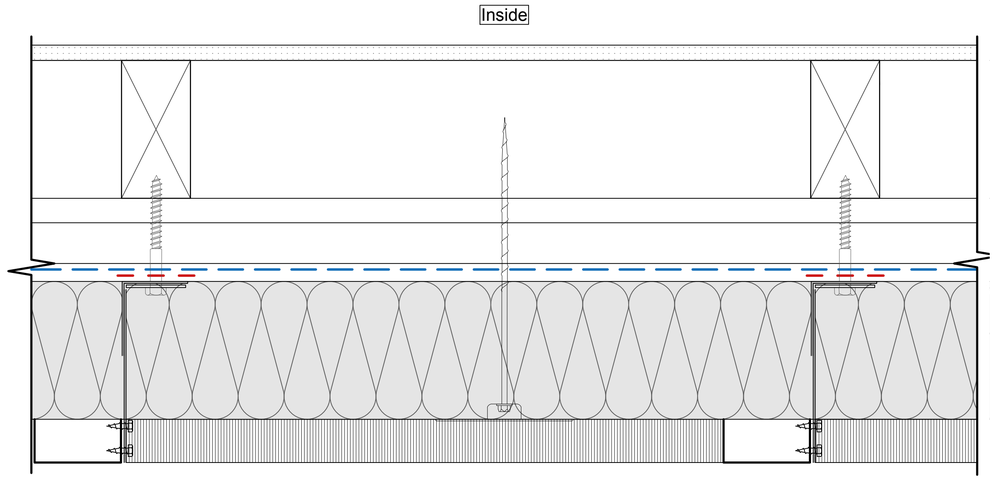

Horizontal Section

Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**


pro clima®


www.proclima.co.nz
www.proclima.com.au


© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

RF2401 Retrofitting Insulation Outside The Wall: From The Outside

Step 6 of 6 - Weatherboards Over Vertical Cavity Battens

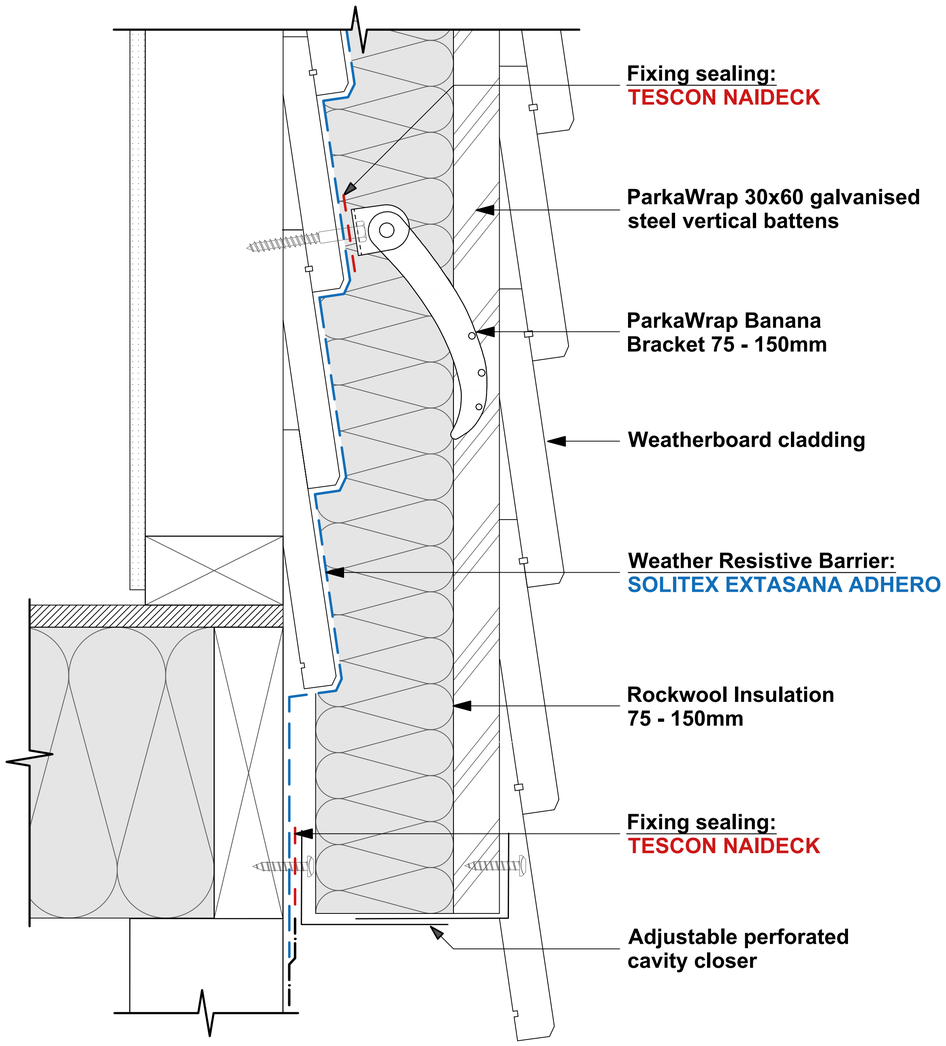

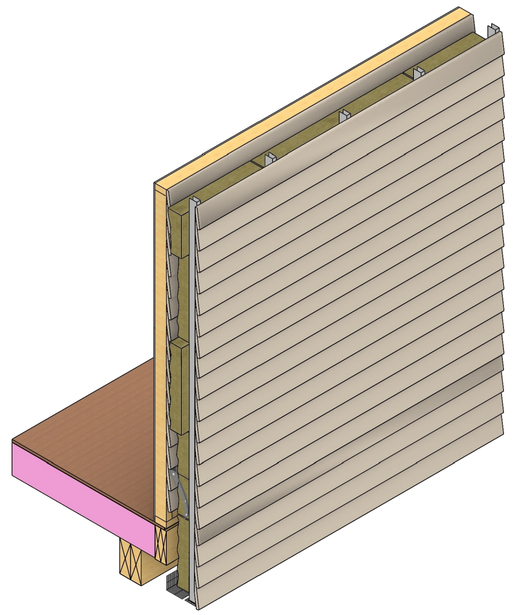

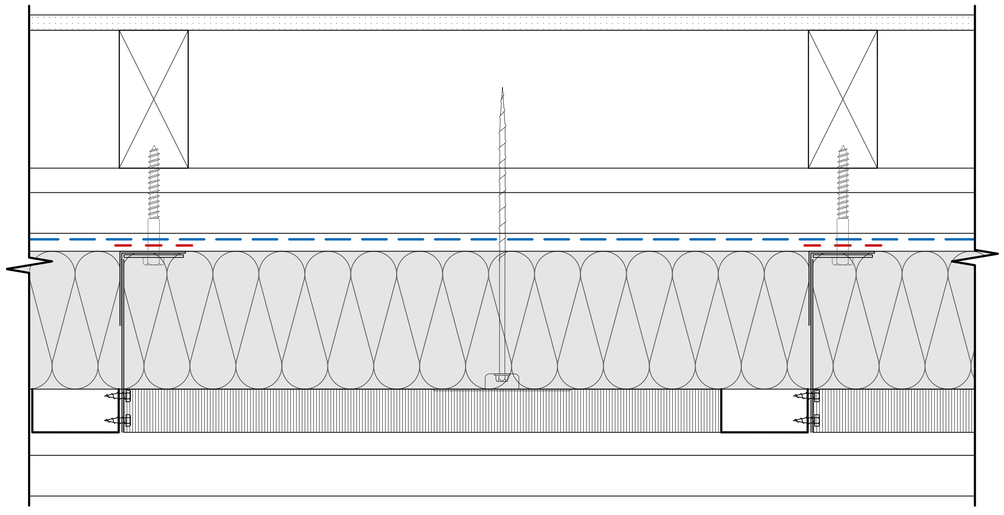

Horizontal Section

Issued: 29/10/2026 **Revision: A** **Scale: 1:2 @ A1**

pro clima®

www.proclima.co.nz
www.proclima.com.au

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline to provide typical Pro Clima system detailing for AS/NZS 4284 prototype testing only and subject to change without notice. For application to specific projects, thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®.
Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.