
PD3611 Cable Penetration Through Cross Laminated Timber (CLT)

KAFLEX Cable Sealing Grommet

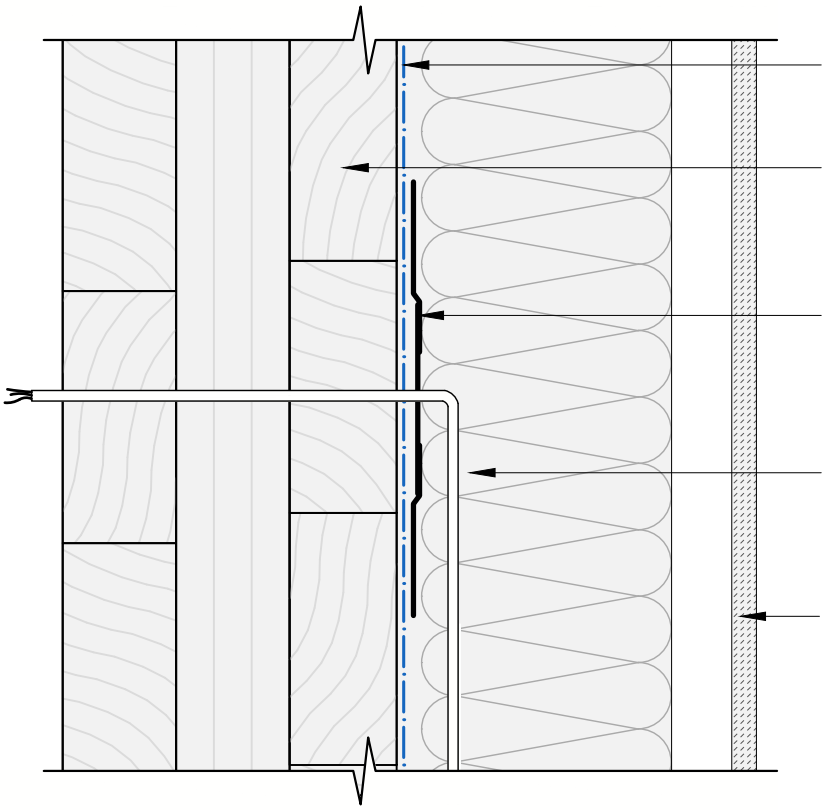

Self Adhesive
Weather Resistant Barrier
SOLITEX EXTASANA ADHERO

Cross Laminated Timber (CLT)

Cable Sealing Grommet
KAFLEX

Cable 6mm - 12mm diameter

Selected Cladding On Cavity

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline only and subject to change without notice. Thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®. Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.