
PD3621 Pipe Penetration Through Cross Laminated Timber (CLT)

ROFLEX Pipe Sealing Grommet

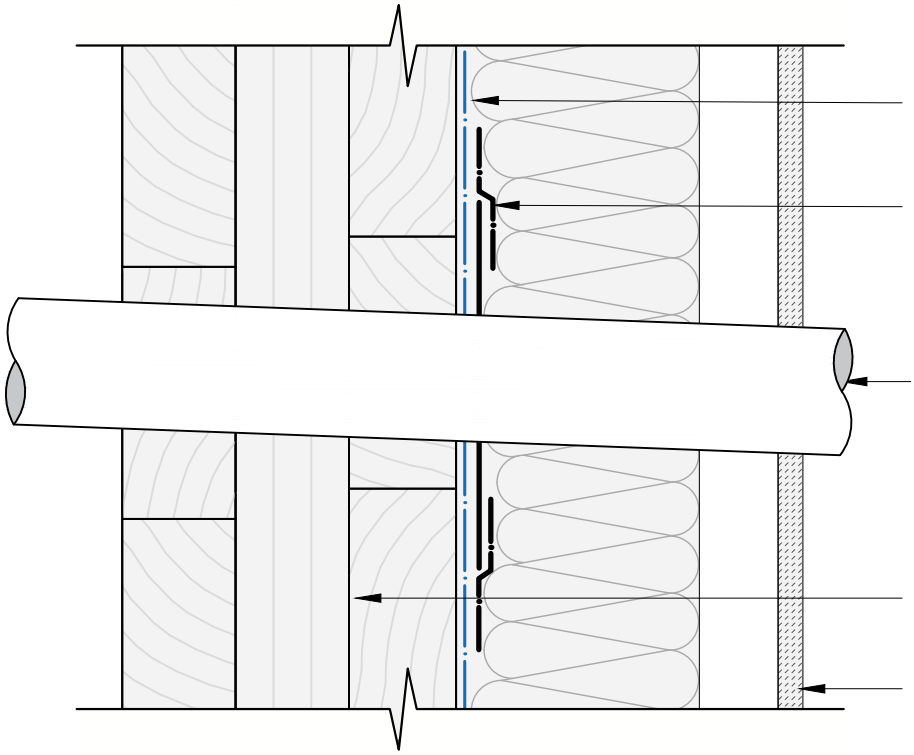

Sealing grommet for pipes of various diameters

ROFLEX 20: Ø 15 mm - 30 mm

ROFLEX 30: Ø 30 mm - 50 mm

ROFLEX 50: Ø 50 mm - 90 mm

ROFLEX 100: Ø 100 mm - 120 mm

ROFLEX 150: Ø 120 mm - 170 mm

ROFLEX 200: Ø 170 mm - 220 mm

ROFLEX 250: Ø 220 mm - 270 mm

ROFLEX 300: Ø 270 mm - 320 mm

pro clima®

www.proclima.co.nz
www.proclima.com.au

PD3621 Pipe Penetration Through Cross-laminated Timber (CLT)

Issued: 28/10/2026 Revision: F Scale: 1:3 @ A4

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline only and subject to change without notice. Thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®. Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.