
PD6121 Pipe Penetration Through Timber Frame

ROFLEX Pipe Sealing Grommet

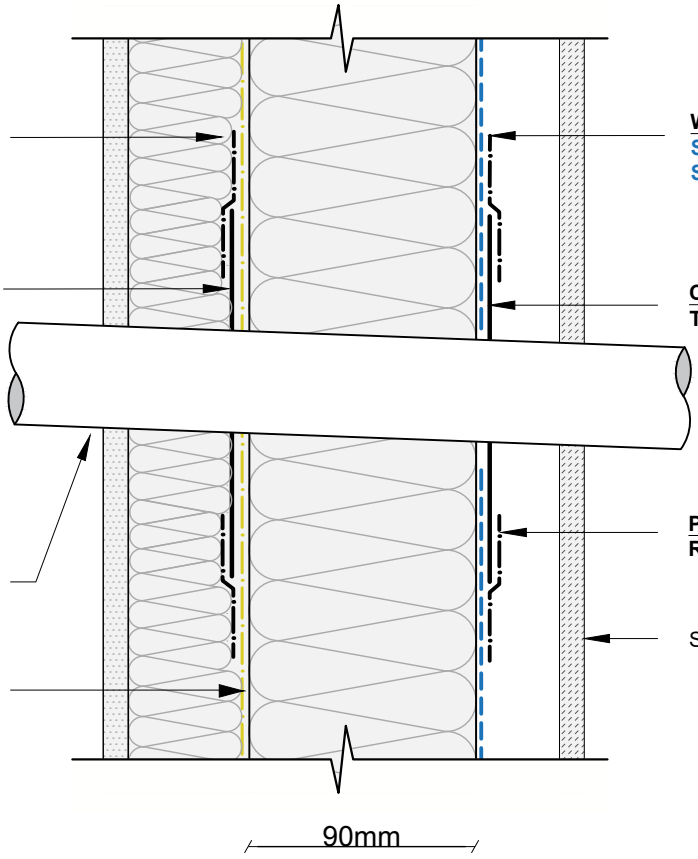

Connection Tape
TESCON EXTORA or
TESCON VANA

Pipe Sealing Grommet
ROFLEX 20 - 300mm

Pipe 20 - 300mm Diameter

Intelligent Air Barrier
INTELLO PLUS

Weather Resistive Barrier
SOLITEX EXTASANA ADHERO® or
SOLITEX® ADHERO FC

Connection Tape
TESCON EXTORA

Pipe Sealing Grommet
ROFLEX 20 - 300mm

Selected Cladding

Sealing grommet for pipes of various diameters

ROFLEX 20: Ø 15 mm - 30 mm

ROFLEX 30: Ø 30 mm - 50 mm

ROFLEX 50: Ø 50 mm - 90 mm

ROFLEX 100: Ø 100 mm - 120 mm

ROFLEX 150: Ø 120 mm - 170 mm

ROFLEX 200: Ø 170 mm - 220 mm

ROFLEX 250: Ø 220 mm - 270 mm

ROFLEX 300: Ø 270 mm - 320 mm

Issued: 28/10/2026 Revision: F Scale: 1:3 @ A4

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline only and subject to change without notice. Thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®. Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.

pro clima®

www.proclima.co.nz
www.proclima.com.au