




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

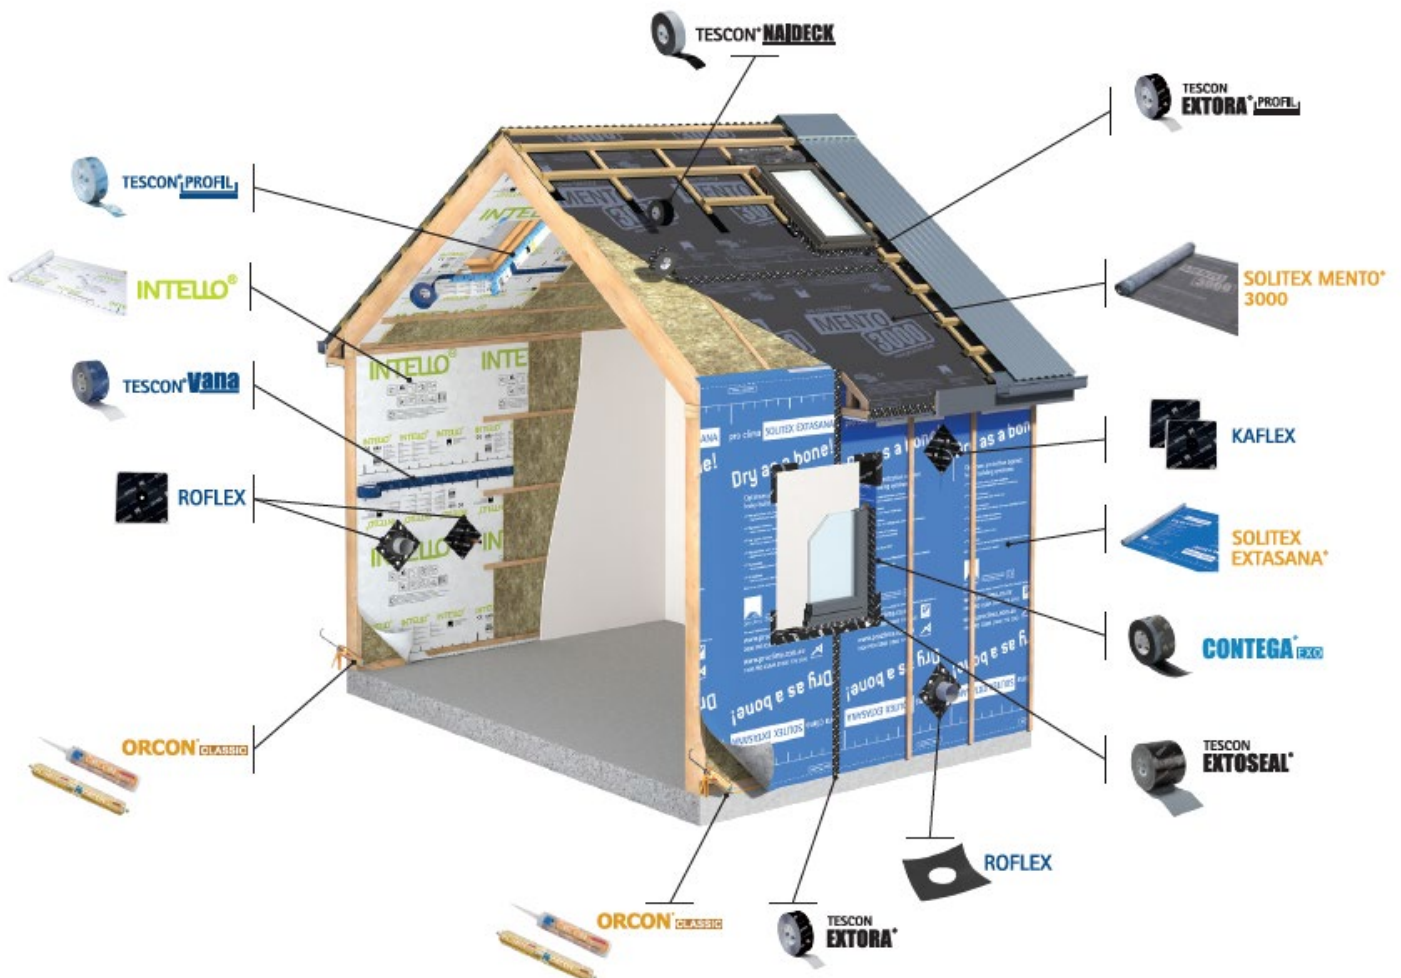

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima ADHERO® Floor Drain

Product description and its intended use (measurements, materials, usage):

ADHERO® Floor Drain provides for vertical drainage through the floors of multi-level mass-timber structures during the construction phase. Installation with connection to a pipe or tube system for temporary drainage of water.

Key Features:

- Quick installation: simply drill through the building component, no cutting necessary
- Dependable drainage: reliable run-off thanks to extra-flat flange, low fitting height
- Watertight bonding: transition between SOLITEX ADHERO and floor drain can be sealed with TESCON EXTORA adhesive tape with SOLID adhesive
- Time-saving and reliable, defined drainage: connection to pipes and tubes for temporary drainage
- Ideal for pre-fabricated panel systems

Key technical specifications:

- Wall thickness: 3.5 mm
- Overall vertical length: 320 mm
- Outer diameter Flange: 300 mm
- Outer diameter Pipe: 63 mm

Product identifier (if applicable):

4026639232007

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: Aotearoa New Zealand Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME Level 1, 47 The Esplanade

SUBURB Petone

CITY, COUNTRY Lower Hutt, New Zealand

POSTCODE 5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

- B2 DURABILITY: Performance clauses B2.3.1 (a) not less than 50 years, B2.3.1 (b) 15 years and B2.3.2.
- E2 EXTERNAL MOISTURE: Performance clause E2.3.2.
- F2 HAZARDOUS BUILDING MATERIALS: Performance clause F2.3.1.

Statement on how the building product is expected to contribute to compliance:

- B2.3.1 (a), (b) and B2.3.2: ADHERO® Floor Drain allows removal of rain water during construction, assisting the structure to comply with the durability requirements.
- E2.3.2: ADHERO® Floor Drain provides drainage through the ceiling or roof structure during the construction phase to prevent the penetration of water into moisture sensitive building elements
- F2.3.1: ADHERO® Floor Drain is safe to handle and will not present a health hazard to people, as it is free from solvents and other dangerous components.

- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

Limitations on the use of the building product:

A short-term build-up depth of 30 mm of water must not be exceeded.

Adhesion of the tape used to fix the ADHERO® Floor Drain in place is not possible on frozen surfaces. There must be no water-repellent substances (e.g. grease or silicone) on materials to be bonded. Subsurfaces must be sufficiently dry and stable. If necessary, remove any moisture with a suitable vacuum cleaner (wet-vac).

Design requirements that would support the appropriate use of the building product:

Ensure no folds or creases in the tape used to install the ADHERO® Floor Drain for the best results.

Installation requirements *(also provide link to the product installation guide)*:

Refer to the ADHERO® Floor Drain installation instructions available from www.proclima.co.nz.

- Drill a hole with a diameter of at least 70 mm. Clean subsurfaces before sticking. Insert the ADHERO® Floor Drain into the drilled hole before sticking down with appropriate tape (pro clima TESCON EXTORA is recommended), with no folds or creases.
- Connect the plastic pipe or temporary downpipe to the outlet of the floor drain and secure it to prevent it slipping off. Ensure the drainage water is diverted away from of the building structure.

Maintenance requirements *(also provide link to the product maintenance guide)*:

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

Yes No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

1 | 1 | 1 | 2 | 2 | 3