




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

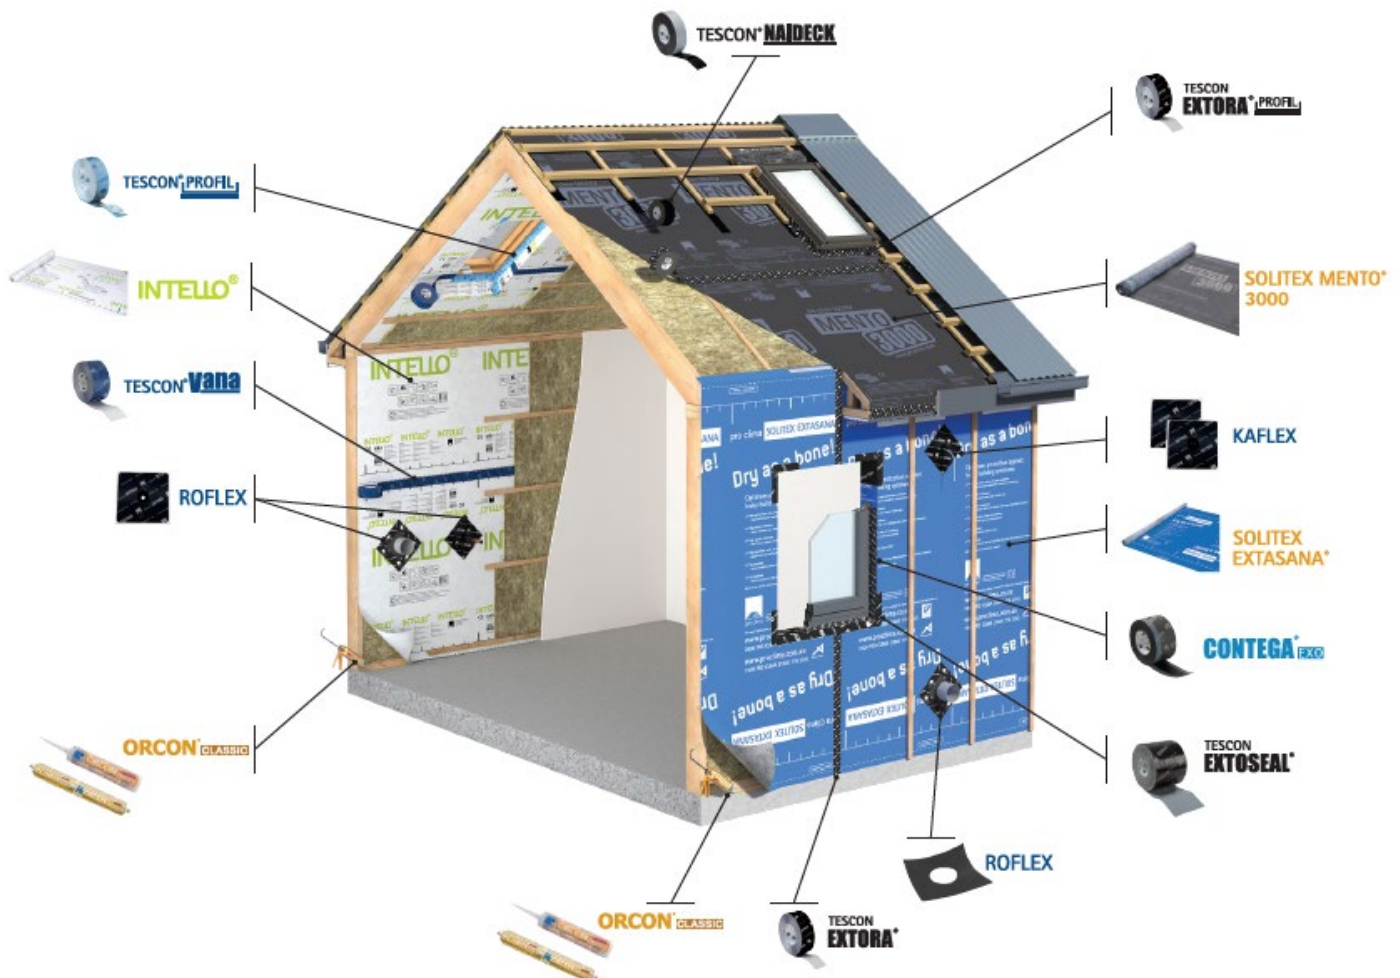

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima AEROFIXX

Product description and its intended use (measurements, materials, usage):

For quick and easy application of AEROSANA® VISCONN and AEROSANA® VISCONN FIBRE sealants from 600 ml foil cartridges onto smooth and rough mineral and non-mineral subsurfaces such as timber, wood fibreboards, OSB, stone, plaster, concrete etc. For use with air compressors capable of up to 6.8 bar (100 psi), 300 l/min air flow.

Key Features:

- Easy, one step application.
- Precise application of material: setting 1 for a line of sealant to close joints, setting 2 to spray over and seal surfaces.
- Allows installer to work with one hand.
- No brush required.
- Pressure: up to 6.8 bar (100 psi).

Product identifier (if applicable):

4026639227140

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: ☐ Aotearoa New Zealand ☒ Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME Level 1, 47 The Esplanade

SUBURB Petone

CITY, COUNTRY Lower Hutt, New Zealand

POSTCODE 5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

•N/A (Tool only)

Statement on how the building product is expected to contribute to compliance:

•N/A (Tool only)

- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

Limitations on the use of the building product:

The general safety regulations for working with compressed air apply. Wear personal protective equipment when working with this device.

Design requirements that would support the appropriate use of the building product:

Installation requirements *(also provide link to the product installation guide):*

Refer to the AEROFIXX usage instructions available from www.proclima.co.nz.

Before connecting to compressed air, screw off the spray head and have required spray nozzles at hand. Insert an AEROSANA VISCONN or AEROSANA VISCONN FIBRE 600 ml foil cartridge into the spray gun. Spray a little lubrication oil, protection oil or silicone spray into the cylinder before it is used for the first time and subsequently from time to time.

Pull the foil cartridge out of AEROFIXX slightly and make a cut with a utility knife or scissors. Then allow it to slide back in again. When putting the spray head on, ensure that the inner spray nozzle lies flat on the foil cartridge.

Connect the spray gun to the compressed air. Air requirement approx. 250 l/min. Set the pressure to 6 bar (87 psi) on the pressure reducer. Set the air throughput on the spray device. The recommended output setting is: set to "fully open" and then turn back by half a revolution.

Turn the ring underneath the spray nozzle: The sealant throughput increases as you turn towards "Line application" and decreases as you turn towards "Spray application"; default setting: medium. The distance to the subsurface should be approx. 10 cm. Spraying should be carried out perpendicular to the subsurface.

You can easily switch between line application and spray application by turning the spray head.

Maintenance requirements *(also provide link to the product maintenance guide)*:

Maintain the AEROFIXX gun as per the manufacturers recommendations that is provided with the product packaging

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

☐ Yes ☒ No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

1 | 1 | 1 | 2 | 2 | 3