




# Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

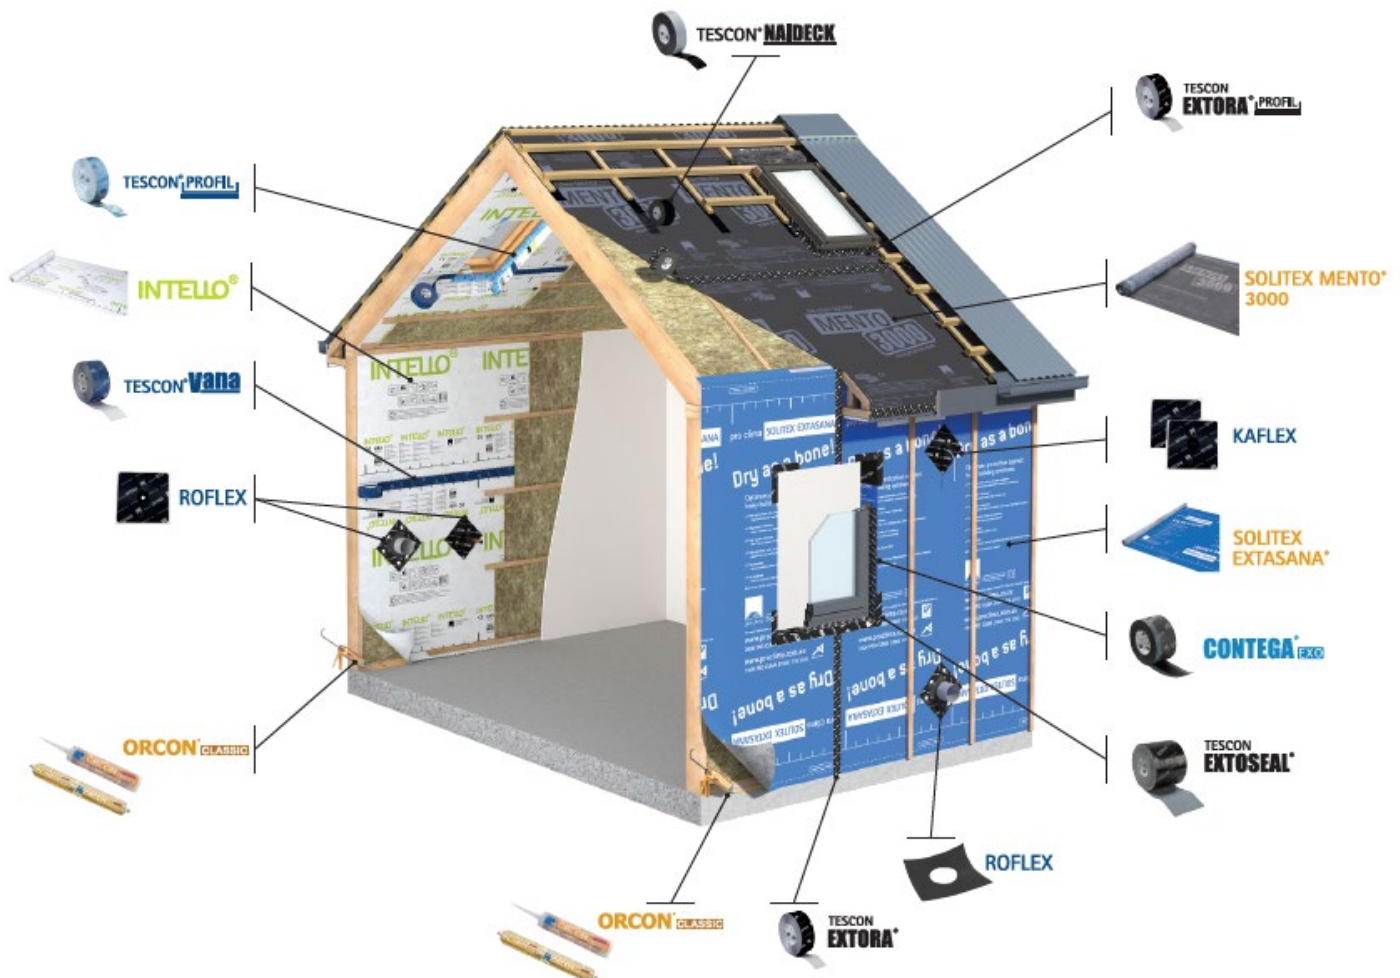

### Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: [support@proclima.co.nz](mailto:support@proclima.co.nz) | General: [welcome@proclima.co.nz](mailto:welcome@proclima.co.nz)

[www.proclima.co.nz](http://www.proclima.co.nz)



# Class 1

## Building Product Information Sheet

Product name (include the brand name):

pro clima KAFLEX mono/duo

Product description and its intended use (measurements, materials, usage):

KAFLEX mono/duo are airtight and weathertight sealing grommets made of strong and flexible EPDM with an integrated adhesive flange. KAFLEX is a beneficial component of all air barrier and weather resistive barrier systems. It is compatible with membranes, underlays as well as rigid sheathings, rigid wall underlays and rigid air barriers (RAB). Strong, flexible, UV stable up to 180 days, with integrated adhesive, and simple-to-remove release paper, ensures maximum productivity during installation. KAFLEX provides an airtight and watertight adhesive seal to the substrate and pressure seal around the cable, for excellent seals under all conditions. Cables and pipes can be pulled or pushed through grommet without damaging the airtightness layer.

Features:

- Airtight & watertight for the life of the building
- High quality EPDM, extremely flexible and elastic
- Excellent UV exposure – up to 180 days
- Long-term durability
- Suitable for penetrations in façades and roof linings

Packaging:

KAFLEX mono/duo grommets are manufactured with a black, soft and flexible 1.2 mm thick EPDM fabric. Grommets are supplied with pre-formed holes. The following grommets are EPDM seals adhered to a polypropylene fleece with a pressure sensitive self-adhering backing and a release backing paper:

- KAFLEX MONO is 145 x 145 mm with a single hole suitable for 1 cable, 6 – 12 mm in diameter. Available in 5 & 30 packs.
- KAFLEX DUO is 145 x 145 mm with two holes suitable for 2 cables, 6 – 12 mm in diameter. Available in 5 & 30 packs.

Product identifier (if applicable):

4026639136282, 4026639136299, 4026639136336, 4026639136312

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: ☐ Aotearoa New Zealand ☒ Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43 SUBURB

CITY, COUNTRY Schwetzingen, GERMANY POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

[info@proclima.com](mailto:info@proclima.com)

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME	Level 1, 47 The Esplanade	SUBURB	Petone
CITY, COUNTRY	Lower Hutt, New Zealand	POSTCODE	5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

- B2 DURABILITY: Performance clauses B2.3.1 (a) not less than 50 years, B2.3.1 (b) 15 years and B2.3.2.
- E2 EXTERNAL MOISTURE: Performance clause E2.3.2.
- E3 INTERNAL MOISTURE: Performance clause E3.3.1
- F2 HAZARDOUS BUILDING MATERIALS: Performance clause F2.3.1.

Statement on how the building product is expected to contribute to compliance:

- B2.3.1 (a), (b) and B2.3.2: KAFLEX and ROFLEX grommets meets these requirements. Provided the selected flexible or rigid underlay is not exposed to the weather or ultra-violet light for longer than stated in the relevant Appraisal, (a maximum of 180 days applies to the KAFLEX and ROFLEX Grommets), and provided the exterior cladding is maintained in accordance with the cladding manufacturer's instructions and the cladding remains weather resistant, KAFLEX and ROFLEX Grommets are expected to have a serviceable life equal to that of the cladding.
- E2.3.2: When used as part of the wall or roof cladding system, KAFLEX and ROFLEX Grommets will contribute to meeting this requirement. Refer to the product BRANZ appraisal for more information
- E3.3.1: When used with an adequate combination of thermal resistance, ventilation and space temperature in habitable spaces, the INTELLO Humidity Variable Intelligent Airtightness System (which includes the KAFLEX & ROFLEX grommets) contributes to meeting this requirement. Although NZBC Clause E3 covers the accumulation of internal moisture, the NZBC Acceptable Solution E3/AS1 makes no specific reference to the requirements and characteristics of barriers to airflow within the concealed spaces in buildings, such as within the wall or ceiling structure. As with all buildings, appropriate levels of ventilation must be provided in buildings fitted with the INTELLO Humidity Variable Intelligent Airtightness System, in accordance with NZBC Performance Clause G4. Where there is a risk that passive ventilation options may not be utilised by building occupants, then installation of permanent ventilation solutions should be considered (e.g. mechanical ventilation systems).



- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

**Limitations on the use of the building product:**

KAFLEX mono/duo Grommets are for sealing round cable penetrations, and ROFLEX Grommets are for sealing pipes or conduit penetrations. Refer to the product BRANZ appraisal for more information

**Design requirements that would support the appropriate use of the building product:**

Refer to the product BRANZ appraisal available from [www.proclima.co.nz](http://www.proclima.co.nz) for more information

**Installation requirements** *(also provide link to the product installation guide):*

Refer to the pro clima INTELLO internal airtightness & SOLITEX wall and roof underlay Application Guides for more information on the use of KAFLEX and ROFLEX grommets within the weathertightness & airtightness control layers. The guides are available from [www.proclima.co.nz](http://www.proclima.co.nz)

**Maintenance requirements** *(also provide link to the product maintenance guide):*

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

☐ Yes ☒ No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

1 | 9 | 1 | 2 | 2 | 3