




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

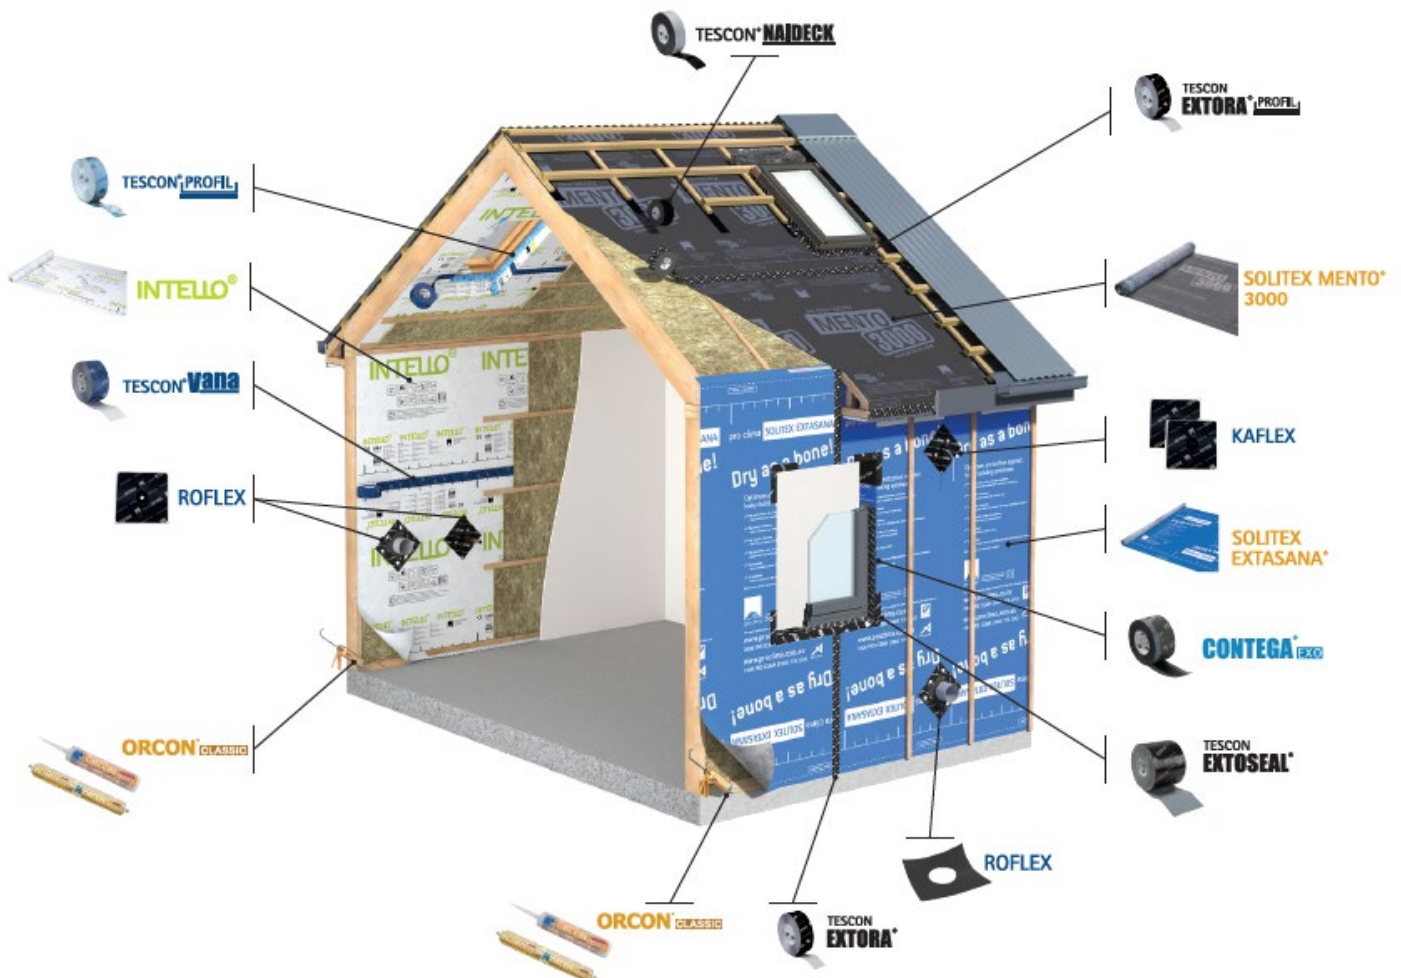

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima TESCON EXTORA® PROFIL

Product description and its intended use (measurements, materials, usage):

TESCON EXTORA® PROFIL weathertight corner sealing tape offers all the benefits of TESCON EXTORA®, with an added split backing for ease of installation. It is a valuable component of weather resistive barrier (WRB) systems requiring connections into corners of window and door installations, or complicated junctions. It is compatible with all pro clima membranes and underlays, as well as rigid sheathings, rigid wall underlays and rigid air barriers (RAB). TESCON EXTORA® PROFIL is weathertight and vapour permeable. It is flexible, easy to cut, and has a 10 / 50 mm split backing release paper, ensuring maximum productivity when things get complicated.

Features:

- Excellent UV resistance (180 days exposure)
- Weathertight & airtight connections for your WRB
- Long-term durability
- Highly vapour permeable
- Outstanding adhesion on cold and/or wet surfaces

Packaging:

TESCON EXTORA Sealing Tape is a pressure-sensitive, self-adhering tape with a PP fleece protection layer and release backing paper. The tape is coloured black with the product and manufacturer's name printed on the face. The tape is supplied in rolls 60 mm wide by 30 m long. The rolls are wrapped in clear plastic. Pro Clima (NZ) Ltd also provide a PRESSFIX application tool to aid installation of the tapes.

Product identifier (if applicable):

4026639150509, 4026639152367

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: Aotearoa New Zealand Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME Level 1, 47 The Esplanade

SUBURB Petone

CITY, COUNTRY Lower Hutt, New Zealand

POSTCODE 5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

- B2 DURABILITY: Performance clauses B2.3.1 (a) not less than 50 years, B2.3.1 (b) 15 years and B2.3.2.
- E2 EXTERNAL MOISTURE: Performance clause E2.3.2.
- F2 HAZARDOUS BUILDING MATERIALS: Performance clause F2.3.1.

Statement on how the building product is expected to contribute to compliance:

- B2.3.1 (a), (b) and B2.3.2: TESCON EXTORA PROFIL corner Sealing Tape meets these requirements. Provided it is not exposed to the weather or ultra-violet light for a total of more than 180 days, and provided the exterior cladding is maintained in accordance with the cladding manufacturer's instructions and the cladding remains weather resistant, TESCON EXTORA PROFIL Sealing Tape is expected to have a serviceable life equal to that of the cladding. The maximum exposure period of the tape may however be limited by the requirements of the substrate manufacturer.
- E2.3.2: TESCON EXTORA PROFIL Sealing Tape contributes to meeting this requirement. Refer to the product BRANZ appraisal for more information
- F2.3.1: TESCON EXTORA PROFIL Sealing Tape meets this requirement and will not present a health hazard to people.

- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

Limitations on the use of the building product:

TESCON EXTORA PROFIL Sealing Tape must not be used on horizontal surfaces, such as sills of joinery openings, where fasteners will penetrate the tape. A self-sealing flashing tape which meets the requirements of AC148:2001 (including nail sealability) and is covered by a valid BRANZ Appraisal, such as Pro Clima (NZ) Ltd TESCON EXTONSEAL (refer BRANZ Appraisal No. 815 (2013) TESCON EXTONSEAL Sill Tape), should be used in these areas.

Design requirements that would support the appropriate use of the building product:

- TESCON EXTORA® PROFIL is a valuable component of weather resistive barrier (WRB) systems requiring connections into corners of window and door installations, or complicated junctions. It is compatible with all pro clima membranes and underlays, as well as rigid sheathings, rigid wall underlays and rigid air barriers (RAB).
- Refer to the product BRANZ appraisal available from www.proclima.co.nz for more information

Installation requirements *(also provide link to the product installation guide):*

Refer to the TESCON EXTORA Application Guide available from www.proclima.co.nz.

Maintenance requirements *(also provide link to the product maintenance guide):*

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

Yes No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

1 | 9 | 1 | 2 | 2 | 3