




pro clima KAFLEX multi

Multiple-Cable Grommet

KAFLEX multi is an airtight and weathertight sealing grommet made of strong and flexible EPDM for sealing up to 16 cables with one grommet. KAFLEX is a beneficial component of all air barrier and weather resistive barrier systems. It is compatible with membranes, underlays as well as rigid sheathings, rigid wall underlays and rigid air barriers (RAB). Strong and flexible, with included punching tool and template, it ensures maximum productivity during installation. KAFLEX provides an airtight and water-tight seal to the substrate and pressure seal around the cable, for excellent seals under all conditions.

- ✓ Airtight connection for the life of the building
- ✓ High quality EPDM, extremely flexible and elastic
- ✓ Long-term durability
- ✓ Practical handling: up to 16 cables can be pushed and pulled through
- ✓ Suitable for penetrations in façades and roof linings

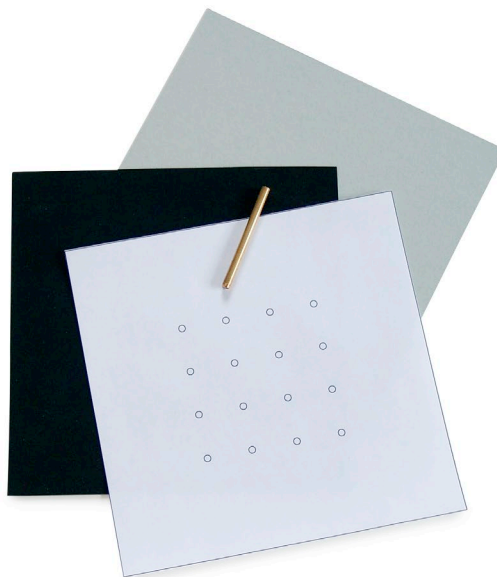

01 2024



Your local NZ support
0800 PRO CLIMA (776 254)
Technical: support@proclima.co.nz
General: welcome@proclima.co.nz
www.proclima.co.nz

Your local AU support
1800 PRO CLIMA (776 254)
Technical: support@proclima.com.au
General: welcome@proclima.com.au
www.proclima.com.au





pro clima KAFLEX multi

Multiple-Cable Grommet

Technical Data

Material:	Ethylene Propylene Diene Monomer (EPDM)
Temperature resistance:	long term -40 °C to +150 °C
Installation temperature:	from -10 °C
UV stability and outdoor exposure:	Indoor/outdoor
Colour:	black
Storage:	cool and dry

IMPORTANT INFORMATION

- Suitable for up to 16 cables with diameter of Ø 5 – 12 mm.
- Template and punching tool included in the set.
- Suitable for round power cables and data cables.

PRODUCT DESCRIPTION

KAFLEX multi is a cable sealing grommet which forms a valuable part of your air barrier system. Made from EPDM, it has excellent workability for secure and permanent airtight seals where round cables penetrate membranes and/or smooth, non-mineral surfaces.

WEATHER EXPOSURE

This product is designed for use with external weather resistive barrier (WRB) systems and internal air barrier systems & will handle some direct exposure to UV and still fulfil the intended use for air control.

APPLICATION NOTES

This product should be taped using the pro clima TESCON® VANA or TESCON® EXTORA tape with PRESSFIX tool to activate the pressure sensitive adhesive and guarantee a long-term durable seal.

The product is most suitable for circular cables providing best airtight seals. For flat cables consider KAFLEX post, TESCON® VANA, TESCON® EXTORA or TESCON® PROFIL for optimum airtight seals.

Delivery Form			
ID CODE	LENGTH	WIDTH	QTY
13630	140 mm	140 mm	2
1AR02181	140 mm	140 mm	10
13634	140 mm	140 mm	20



Your local NZ support
0800 PRO CLIMA (776 254)
Technical: support@proclima.co.nz
General: welcome@proclima.co.nz
www.proclima.co.nz

Your local AU support
1800 PRO CLIMA (776 254)
Technical: support@proclima.com.au
General: welcome@proclima.com.au
www.proclima.com.au

