




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

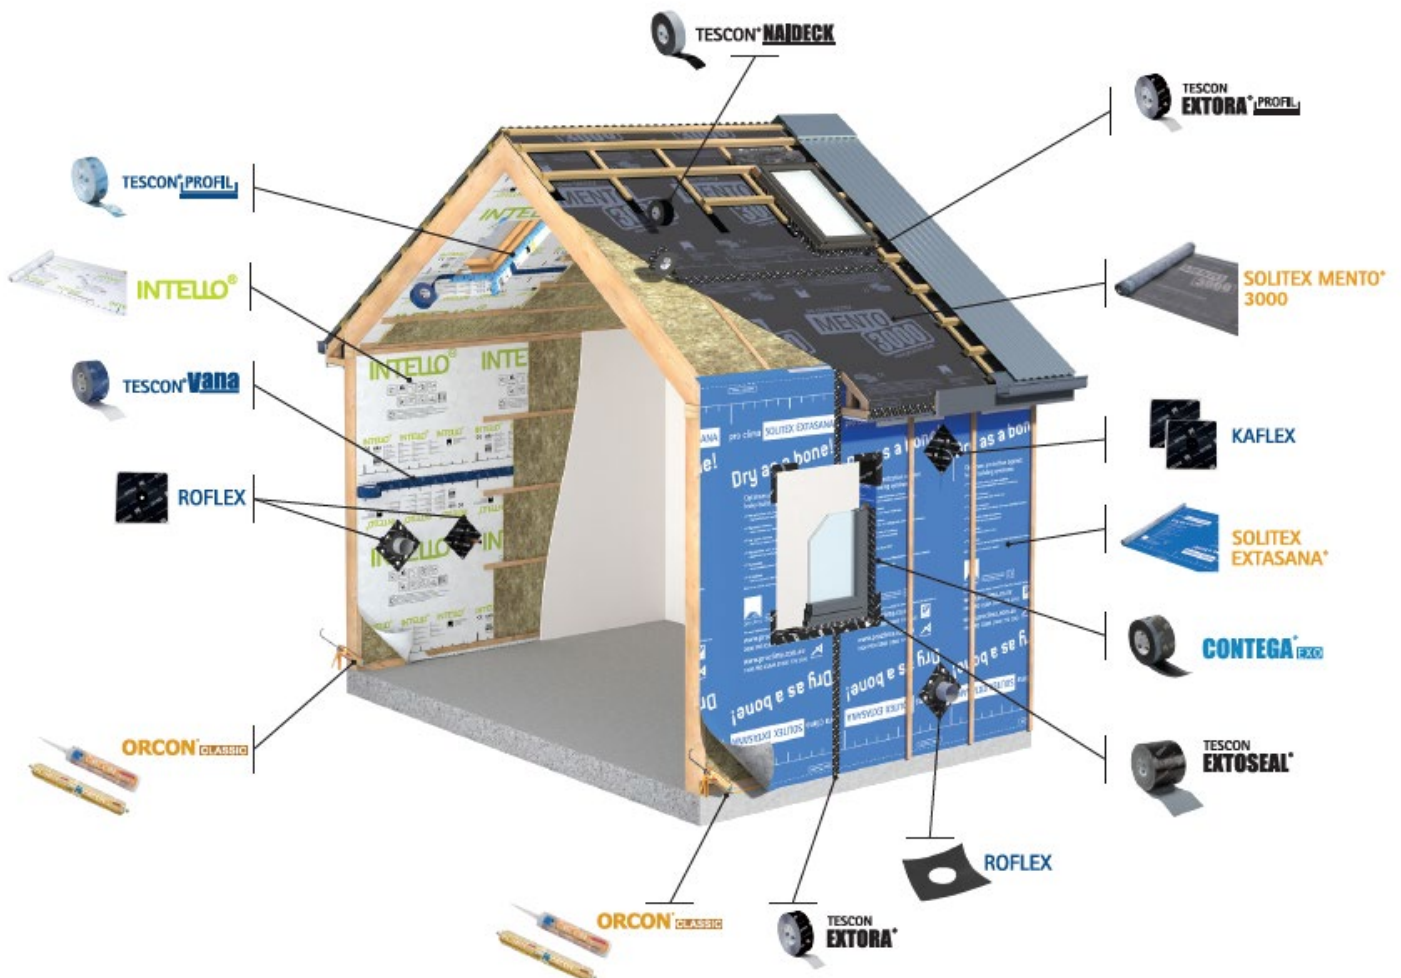

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima SOLITEX® ADHERO VISTO

Product description and its intended use (measurements, materials, usage):

SOLITEX® ADHERO VISTO provides the ultimate weather protection during construction. Thanks to its full-surface adhesion, this membrane provides airtightness and weather protection for intermediate floors on multi-storey mass timber (e.g. cross-laminated timber) or wooden-frame buildings during the construction period.

Features:

- Protects the structure during construction
- 6 Weeks outdoor exposure
- Transparent in colour so markings, connectors and penetrations on timber floors remain visible
- Durable, anti-slip surface for safe working, even in wet conditions
- Ideal for pre-fab systems

Packaging:

SOLITEX® ADHERO VISTO consists of a Polyethylene copolymer water-resistant membrane with a transparent Polypropylene cover fleece and water resistant solid adhesive backing. The product includes a silicone coated PE release film, and is supplied in rolls 1.5 m wide and 30 m long. The product is printed with the SOLITEX® ADHERO VISTO logo repeated along the length of the roll in transparent white. The rolls are wrapped in clear polythene film.

Product identifier (if applicable):

4026639240262

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: Aotearoa New Zealand Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Pro Clima (NZ) Ltd

Level 1, 47 The Esplanade

Petone

Lower Hutt, New Zealand

5012

www.proclima.co.nz

welcome@proclima.co.nz

04 589 8460

9429033909561

B2 DURABILITY:

- Performance clauses B2.3.1 (a): Building elements must, with only normal maintenance, continue to satisfy the performance requirements of this code for the lesser of the specified intended life of the building, if stated, or:

(a) The life of the building, being not less than 50 years, if:

(i) Those building elements (including floors, walls, and fixings) provide structural stability to the building, or

(ii) Those building elements are difficult to access or replace, or

(iii) Failure of those building elements to comply with the building code would go undetected during both normal use and maintenance of the building.

E2 EXTERNAL MOISTURE:

- Functional requirement clause E2.2: Buildings must be constructed to provide adequate resistance to penetration by, and the accumulation of, moisture from the outside.

- Performance clause E2.3.4: Building elements susceptible to damage must be protected from the adverse effects of moisture entering the space below suspended floors.

F2 HAZARDOUS BUILDING MATERIALS:

- Performance clause F2.3.1: The quantities of gas, liquid, radiation or solid particles emitted by materials used in the construction of buildings, shall not give rise to harmful concentrations at the surface of the material where the material is exposed, or in the atmosphere of any space.

- B2.3.1

SOLITEX® ADHERO VISTO helps timber flooring substrates such as CLT meet these requirements by providing temporary protection from moisture ingress during construction, provided it is not exposed to the weather or ultra-violet light for a total of more than 6 weeks.

- E2.2

SOLITEX® ADHERO VISTO meets this requirements as a temporary weathertightness layer for CLT and other timber flooring substrates.

- E2.3.4

SOLITEX® ADHERO VISTO meets this requirement as a temporary moisture protective layer for CLT and other types of timber flooring.

- F2.3.1

SOLITEX® ADHERO VISTO meets these requirements, and will not present a health hazard to people.

Limitations on the use of the building product:

- SOLITEX® ADHERO VISTO must not be exposed to the weather for more than 6 weeks.
- SOLITEX® ADHERO VISTO must be installed on site when the substrate is dry, or in a factory
- SOLITEX® ADHERO VISTO is designed for use on timber floors. For use in any other application, talk to a pro clima representative or building envelope specialist.
- Installation must always be carried out in accordance with the SOLITEX® ADHERO VISTO Technical Literature, and by or under the supervision of, a Licensed Building Practitioner (LBP) with the relevant Licence Class.

Design requirements that would support the appropriate use of the building product:

- SOLITEX® ADHERO VISTO is used in conjunction with CLT and other timber flooring substrates, and is not to be specified for use on walls or over framing.

Installation requirements *(also provide link to the product installation guide)*:

Refer to the SOLITEX® ADHERO VISTO Application Guides available from www.proclima.co.nz.

Maintenance requirements *(also provide link to the product maintenance guide):*

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

Yes No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

2 | 4 | 0 | 7 | 2 | 4