




Complete building envelope system products

Knowledge & support

German technology, proven in New Zealand

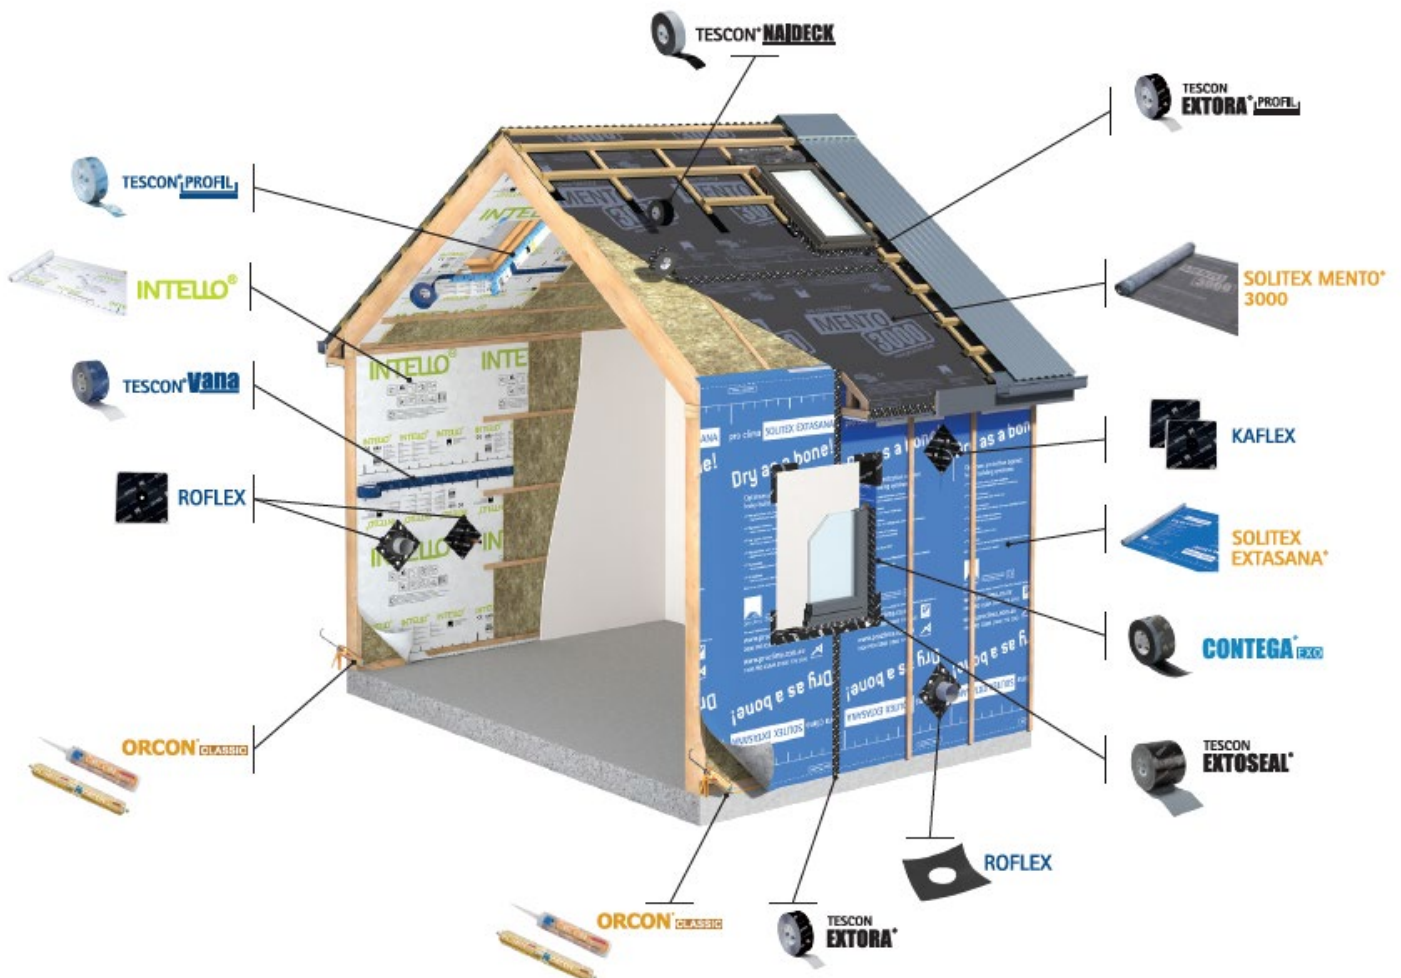

Your local support

04 589 8460 | 09 892 9900 | 03 327 4925

Technical: support@proclima.co.nz | General: welcome@proclima.co.nz

www.proclima.co.nz



Class 1

Building Product Information Sheet

Product name (include the brand name):

pro clima COMPEGO

Product description and its intended use (measurements, materials, usage):

COMPEGO is a flexible elastic tape with high adhesion strength. Use to permanently seal overlaps, joints and connections for vapour-closed products. Use cases: taping XPS Foam insulation boards, Polyethylene sheet (underslab DPM), Foil-faced vapour-tight insulation boards, steel-skinned SIP panels.

Features:

- 90 days of outdoor exposure
- For airtight sealing
- Water-resistant adhesive
- Lowest VOC rating in hazardous substance test. Tested according to ISO 16000

Packaging:

COMPEGO is a pressure-sensitive, self-adhering tape with an elastic PE film, solid acrylic adhesive backing and soliconized backing paper. The tape is coloured blue with the product and manufacturer's name printed on the face in white. The tape is supplied in rolls 60, 100, 150 wide by 25 m long. Pro Clima (NZ) Ltd also provide a PRESSFIX application tool to aid installation of the tapes.

Product identifier (if applicable):

4026639153579, 4026639153852, 4026639153869

(This could be a Global Trade Item Number (GTIN) or quick response code (QR code), or any other distinguishable part/model number or identifier.)

Place of manufacture: Aotearoa New Zealand Overseas

Legal and trading name of the manufacturer(s):

MOLL bauökologische Produkte GmbH

Address for service:

STREET NAME Rheintalstraße 35 - 43

SUBURB

CITY, COUNTRY Schwetzingen, GERMANY

POSTCODE 68723

Website:

<http://www.proclima.com>

Email address:

info@proclima.com

Phone no. (if applicable):

+49 (0) 6202 2782-0

NZBN (if applicable):

N/A

Legal and trading name of the importer (if applicable):

Pro Clima (NZ) Ltd

Address for service:

STREET NAME Level 1, 47 The Esplanade

SUBURB Petone

CITY, COUNTRY Lower Hutt, New Zealand

POSTCODE 5012

Website:

www.proclima.co.nz

Email address:

welcome@proclima.co.nz

Phone no. (if applicable):

04 589 8460

NZBN (if applicable):

9429033909561

Relevant Building Code clauses:

- B2 DURABILITY: Performance clauses B2.3.1 (a) not less than 50 years, B2.3.1 (b) 15 years and B2.3.2.
- E2 EXTERNAL MOISTURE: Performance clause E2.3.2.
- F2 HAZARDOUS BUILDING MATERIALS: Performance clause F2.3.1.

Statement on how the building product is expected to contribute to compliance:

- B2.3.1 (a), (b) and B2.3.2: COMPEGO tape meets these requirements. Provided it is not exposed to the weather or ultra-violet light for a total of more than 90 days, and provided the exterior cladding is maintained in accordance with the cladding manufacturer's instructions and the cladding remains weather resistant, COMPEGO tape is expected to have a serviceable life equal to that of the cladding. The maximum exposure period of the tape may however be limited by the requirements of the substrate manufacturer.
- E2.3.2: TESCON EXTORA tape contributes to meeting this requirement. Refer to the product BRANZ appraisal for more information
- F2.3.1: TESCON EXTORA tape meets this requirement and will not present a health hazard to people.

- options for compliance set out in section 19 of the Act (regulations, acceptable solution, verification method)
- standard or technical document that describes the performance of the building product or the relevant specifications to which the building product was manufactured
- physical properties of the building product
- how the building product is intended to be used.

Limitations on the use of the building product:

- COMPEGO tape must only be used on vapour closed substrates.
- COMPEGO is not designed to be permanently exposed to UV light.
- Refer to the Technical Data sheet for more information.

Design requirements that would support the appropriate use of the building product:

- Used to seal laps in underslab DPM, and vapour closed insulation and SIPs panels
- Refer to the Technical Data sheet for more information.

Installation requirements *(also provide link to the product installation guide):*

- Refer to the pro clima website for more information

www.proclima.co.nz.

Maintenance requirements *(also provide link to the product maintenance guide):*

There are no specific maintenance requirements. The product is covered or protected by the subsequent layers of the building assembly and is inaccessible while in service.

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?:

Yes No

If yes, description of the warning or ban under section 26:

N/A

Version:

1

Date:

0 | 4 | 0 | 9 | 2 | 4